

RZR-14-SW
POLARIS® RZR® SUBWOOFER ENCLOSURE
OWNER'S MANUAL



THANK YOU

Congratulations and thank you for purchasing the MTX Audio direct-fit subwoofer enclosure designed for the Polaris® RZR®. Our sub enclosure, with its high output 10" subwoofer, will belt out the bass and deliver ground pounding audio making you the party vehicle in any ride! With a few basic hand tools in your trusty toolbox, you can have this installed in no time. So, what are you waiting for? It's time to get the rumble in your ride and go hit the trails! Oh, and congratulations on your purchase, thanks for your support and most importantly, enjoy the ultimate audio experience with MTX!

WE'RE HERE TO HELP

We're here to help with any installation or technical support. Visit mtx.com to chat, call 1-800-225-5689 to speak with an MTX Technical Support representative, or visit youtube.com/user/MTXAudioUSA to view product videos.

DON'T FORGET TO REGISTER YOUR PRODUCT

Don't forget to register your new MTX Audio product. Visit mtx.com/productregistration or scan the QR code to the right.

Model # _____

Serial # _____

Dealer's Name _____

Date of Purchase _____



MAKE SURE TO READ THIS

Installation of this enclosure will **delete** the factory supplied glove box.

If the RZR-14-SW subwoofer enclosure is being installed along with the RZR-14-FS kick panel speaker pods, the subwoofer must be installed first.

The Quick Install Port Seal cap allows the enclosure to be used as a sealed system. For maximum bass, we recommend removing the cap for normal operation but keeping it in the vehicle. In the event of a deep water or submersion situation, the cap can quickly be reinstalled to prevent water penetration into the enclosure.

IMPORTANT NOTICE

Whenever working on the vehicle, it is recommended to disconnect the battery prior to starting work. Failure to do so may lead to a risk of electric shock or equipment damage.

When connecting power and ground wires ensure that the red power wire is fused at the point where it is connected to the vehicle's battery. Failure to do so can result in damage to the vehicle if a short circuit develops between the vehicle connection point and the product.



FEATURES

- Can Be Used as a Ported or Sealed Enclosure
- Includes an MTX 55 Series Subwoofer for its Deep Bass Reproduction Capabilities
- QuiPS (Quick Install Port Seal) Technology
- Mounts Behind Dashboard
- Factory Matched Texture
- Installer Friendly Design
- Direct Fit, No Cutting or Drilling Required

SPECIFICATIONS

- 10" Loaded Subwoofer Enclosure
- RMS Power Handling: 400-Watts
- Peak Power Handling: 800-Watts
- Sensitivity (2.83V/1m): 90.2dB
- Sensitivity (1W/1m): 83.5dB
- Frequency Response: 28Hz - 130Hz
- Impedance: Dual 4Ω

FIT GUIDE

RZR 900	2014 - 2020
RZR 900 XC	2015 - 2020
RZR 2 900 EPS	2014 - 2018
RZR 4 900 EPS	2014 - 2020
RZR S 900.....	2014 - 2020
RZR S 1000.....	2017 - 2020
RZR S4 1000.....	2019 - 2020
RZR XP 1000.....	2014 - 2020
RZR XP Turbo	2016 - 2020
RZR XP Turbo S.....	2019 - 2020
RZR XP Turbo Dynamix Edition	2018 - 2020
RZR XP 4 1000	2014 - 2020
RZR XP 4 Turbo	2016 - 2020
RZR XP 4 Turbo S.....	2019 - 2020
RZR XP 4 Turbo Dynamix Edition	2018 - 2020
RZR XP 1000 Trails and Rocks.....	2019 - 2020
RZR XP 1000 High Lifter.....	2014 - 2020
RZR XP 4 1000 High Lifter.....	2014 - 2020

FIT GUIDE NOTES


Kits featuring a subwoofer are not compatible with Polaris® heater option (located where the subwoofer enclosure should fit).

IN THE BOX


- RZR-14-SW Loaded Subwoofer Enclosure
- Mounting Hardware
 - (2) Mounting Brackets
 - (6) 10mm Screws
 - (1) T40 Torx Screw

DISASSEMBLY - RZR MODELS 2019+

Step 1 - Release the two quick locks to remove the hood from the vehicle. Lift the hood and slide it towards the front of the vehicle

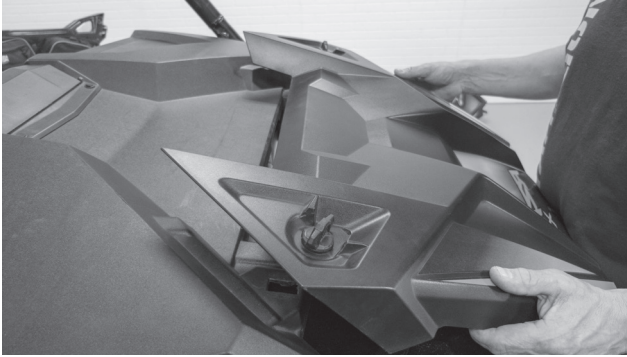

Step 2 - Remove the four (4) T40 screws holding down the top dash cover.

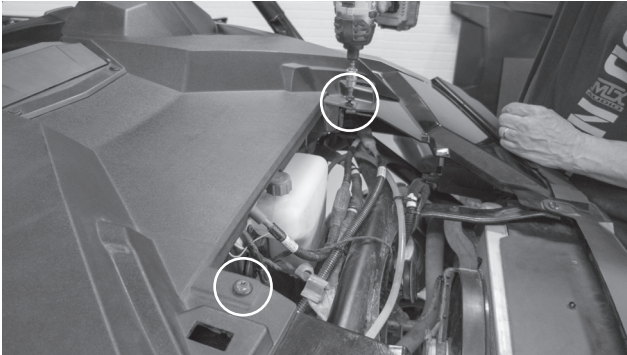


Driver Side




Passenger Side


Step 3 - Remove the retaining clips holding the center dash compartment in place. Remove the compartment.

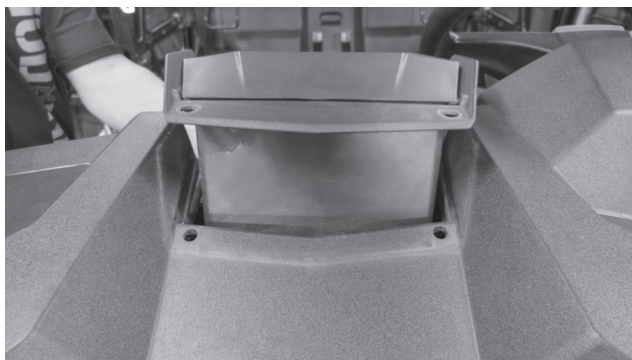


Step 4 - Remove the dash top panel.

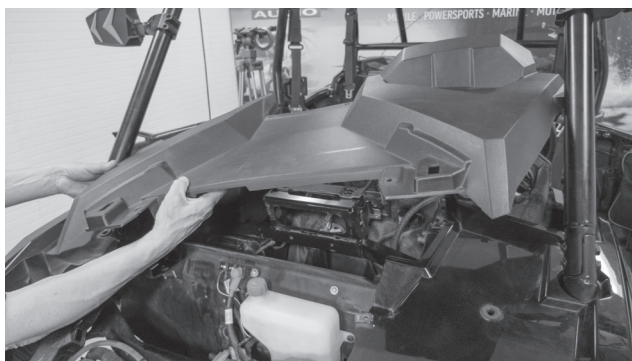


Step 5 - Remove the two (2) bolts in the center behind the dash. **Note:** For vehicles with Ride Command units, you may find two additional bolts on either side of the display. Remove these if present.

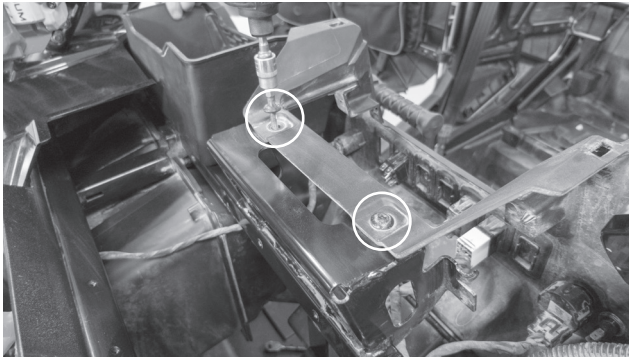

Step 6 - Remove the T-handle and clip.

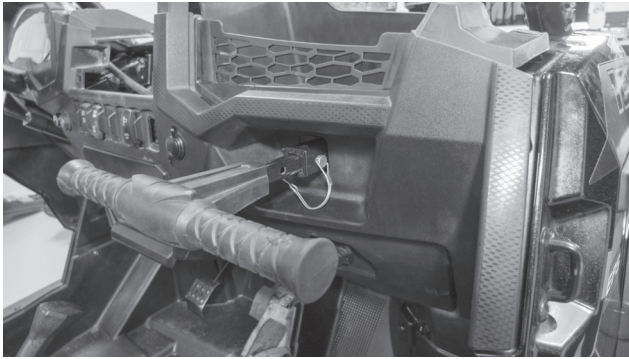

Step 7 - Remove the Torx head screw from the dash pocket brace. After this is removed the plastic dash pocket can be pulled out of the dash.

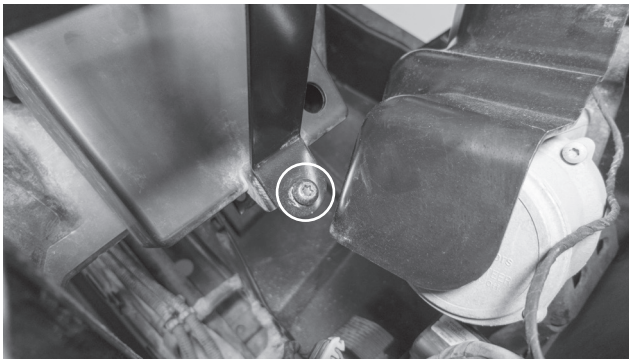




Step 8 - Unplug the gauge and switches making sure not to damage the vehicle and ignition wiring. Make note to remember what connector is associated with each specific switch.




Step 9 - Carefully lift the dash out of the vehicle. There are locking clips on the right and left side that hold it in place. The dash will pop out. If the locking clips have fallen off, place them back onto the locking tabs on the dash. These are needed to re-assemble the dashboard.



Step 10 - Remove the retaining clips holding the passenger side dash compartment in place. Remove the compartment.

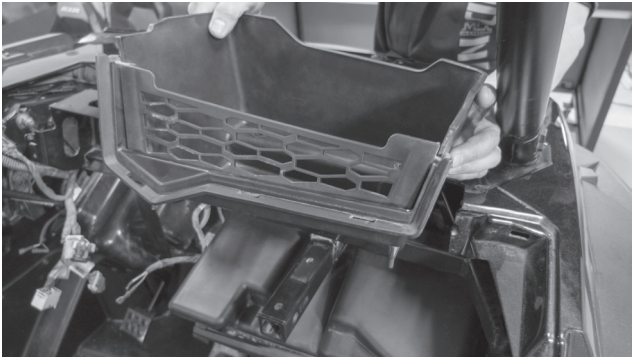


Step 11 - Remove the two (2) 10mm bolts above the glove box.

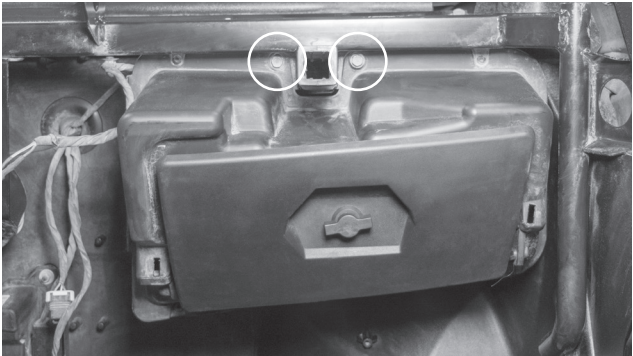

Step 12 - Remove the glove box.



Step 13 - Remove one (1) T40 Torx screw located directly above left foot rest on passenger side.

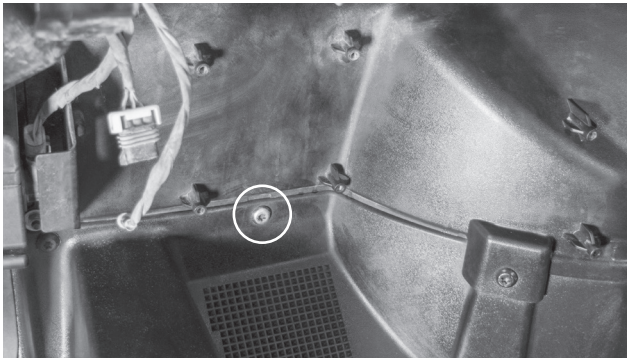

The vehicle disassembly process is now complete. Please turn to page 14 to continue with the product installation process.

DISASSEMBLY - RZR MODELS 2014 - 2018


Step 1 - Release the two quick locks to remove the hood from the vehicle.




Step 2 - Lift up the hood and slide towards the front of the vehicle.



Step 3 - Remove the two (2) T40 screws holding down the top dash cover.

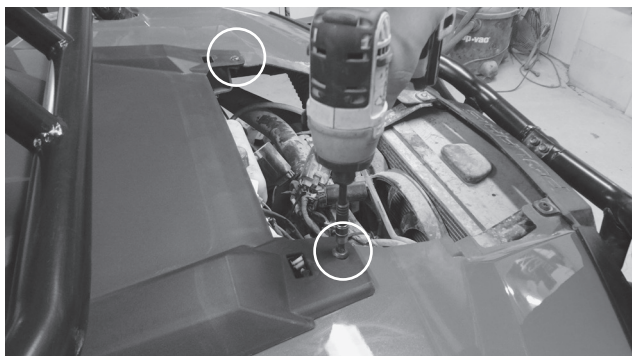

Step 4 - Lift and pull back the top dash cover to release the clips holding it in place. Unplug the gauge and switches making sure not to damage the vehicle and ignition wiring. Make note to remember what connector is associated with each specific switch.

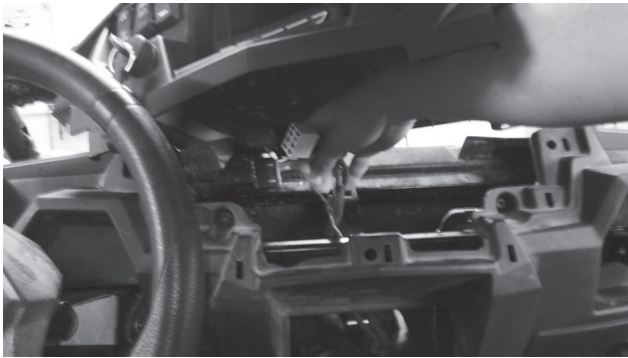

Step 5 - Remove the Torx head screw from the dash pocket brace. After this is removed the plastic dash pocket and bracket can be pulled out of the dash.



Step 6 - Remove the two (2) T40 screws holding the dashboard in place.




Step 7 - Pull the dashboard towards the back of the vehicle. There are locking clips on the right and left side that hold it in place. The dash will pop out.



Step 8 - Carefully lift the dash out of the vehicle. If the locking clips have fallen off, place them back onto the locking tabs on the dash. These are needed to re-assemble the dashboard.




Step 9 - Remove the two (2) 10mm hex bolts that are holding the glove box to the vehicle frame. When the screws are removed the glove box can be lowered down and out of the enclosure.

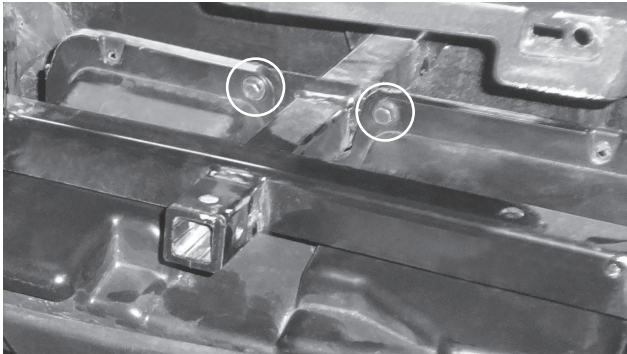

The vehicle disassembly process is now complete. Please turn to page 14 to continue with the product installation process.

INSTALLATION


Step 1 - Install the large hardware bracket on the RZR-14-SW subwoofer enclosure using one 10mm bolt as pictured. Hand-tighten so the bracket is able to slide left to right.

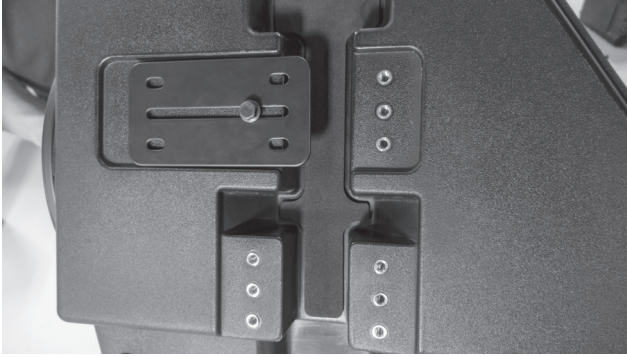

Step 2 - Hang the subwoofer enclosure from the T-handle mounting bar as shown by sliding the installed bracket over the bar. Install five additional 10mm bolts hand-tight.



Note: The second mounting bracket included is used for all 2014 - 2018 models only.

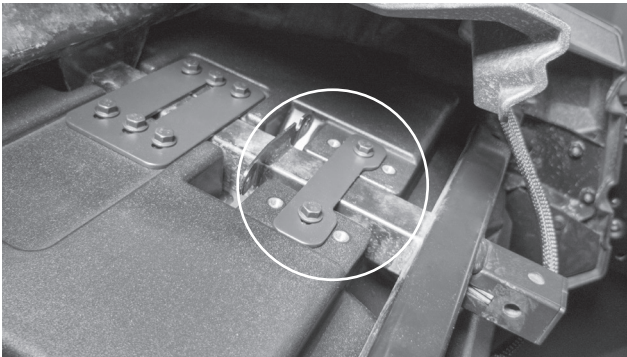

Step 3 - Install the supplied Torx screw in the lower mounting hole aligning with the factory hole in the footwell and tighten.



Step 4 - Tighten all remaining hardware.

Step 5 - Feed wire into dash towards amplifier mounting location. **Note:** In the event this is not used with an MTX THUNDER SYSTEM, it will be necessary to cut off the connector and hardwire directly to your equipment.

Step 6 - Reassemble and go ride.

WARRANTY PERIOD

At MTX Audio we engineer products that will stand up to the test of time. We also realize that from time to time a problem may occur. That's why our products carry a 2-year limited warranty that begins at the time of sale to the end user.

Of course, we're here to help. If you experience an issue with any of our products within the warranty period, please contact our customer service technical line at 1-800-CALL-MTX to help troubleshoot your issue. If, after speaking with our technical experts it is determined that a problem lies with the product, the technician will provide you with a Return Authorization number and all relevant details you'll need to get the product taken care of.

MITEK WARRANTY

Mitek Mobile products (including, but not limited to: MTX, Coustic, Streetwires, Xtant, BassSlammer, and Thunder Marine) purchased in the USA from an AUTHORIZED MITEK DEALER are guaranteed against defects in material and workmanship for the period of time specified. The warranty period begins the day the product is purchased by the end user, and this warranty is limited to the original retail purchaser of product. Products found to be defective during the warranty period will be repaired or replaced with equivalent product by Mitek at no charge. This warranty is void if it is determined that unauthorized parties have attempted repairs or alterations of any nature, and the warranty does not extend to cosmetics or finish. Mitek disclaims any liability for other incurred or consequential damages resulting from product defects. Mitek's total liability will not exceed the purchase price of the product.



Let's Get Social
mtx.com



Like, Follow, & Subscribe

© 2020 Mitek Corporation. All rights reserved. MTX is a trademark of Mitek Corporation. All other trademarks are property of their respective owners. Designed and Engineered in the U.S.A.

Due to continual product development, all specifications are subject to change without notice.

MTX Audio, 4545 East Baseline Rd. Phoenix, AZ 85042 U.S.A. 1-800-225-5689

MTX006073 RevA 2/20 • 21A10765 • AW0015798